

**ME691, ME693
NPSM SWIVEL WELDMENT
INSTALLATION AND
OPERATING INSTRUCTIONS**



!WARNING!

Failure to follow these instructions or to properly install and maintain this equipment could result in an explosion and/or fire causing property damage and personal injury or death.

MEC equipment must be installed, operated, and maintained in accordance with federal, state, and local codes and manufacturer's instructions. The installation in most states must also comply with NFPA No. 58, and ANSI Standard K61.1.

Only personnel trained in the proper procedures, codes, standards, and regulations of the LP-Gas industry should install and service this equipment.

!GENERAL WARNING!

Marshall Excelsior products are mechanical devices that are subject to wear, contaminants, corrosion, and aging of components made of materials such as rubber and metal. Over time these devices will eventually become inoperative. The safe service life of these products will reflect the environment and conditions of use that they are subjected to. Regular inspection and maintenance is essential. Marshall Excelsior products have a long record of quality and service, so LP-Gas dealers may forget hazards that can arise from using aging devices that have outlived their safe service life.



WARNING: These products contain a chemical known to the state of California to cause cancer and birth defects or reproductive harm

Scope of the Manual

This manual covers the installation and usage of the ME691 and ME693 series NPSM swivel weldments.

Marshall Excelsior Company
1506 George Brown Drive Marshall, MI 49068
Phone (269) 789-6700 Fax (269) 781-8340
www.marshallexcelsior.com

**ME691, ME693
NPSM SWIVEL WELDMENT
INSTALLATION AND
OPERATING INSTRUCTIONS**



!WARNING!

Failure to follow these instructions or to properly install and maintain this equipment could result in an explosion and/or fire causing property damage and personal injury or death.

MEC equipment must be installed, operated, and maintained in accordance with federal, state, and local codes and manufacturer's instructions. The installation in most states must also comply with NFPA No. 58, and ANSI Standard K61.1.

Only personnel trained in the proper procedures, codes, standards, and regulations of the LP-Gas industry should install and service this equipment.

!GENERAL WARNING!

Marshall Excelsior products are mechanical devices that are subject to wear, contaminants, corrosion, and aging of components made of materials such as rubber and metal. Over time these devices will eventually become inoperative. The safe service life of these products will reflect the environment and conditions of use that they are subjected to. Regular inspection and maintenance is essential. Marshall Excelsior products have a long record of quality and service, so LP-Gas dealers may forget hazards that can arise from using aging devices that have outlived their safe service life.



WARNING: These products contain a chemical known to the state of California to cause cancer and birth defects or reproductive harm

Scope of the Manual

This manual covers the installation and usage of the ME691 and ME693 series NPSM swivel weldments.

Marshall Excelsior Company
1506 George Brown Drive Marshall, MI 49068
Phone (269) 789-6700 Fax (269) 781-8340
www.marshallexcelsior.com



Introduction

The ME691 and ME693 series swivel connectors are designed to allow rigid connections between a socket or butt weld and NPT piping, NPSM or other similar connections.


Features:

- Steel or stainless material
- Crimped free-spinning swivel for ease of use and high holding strength
- Rust-inhibited weldment end compatible with standard and MEC™ weld sockets, as well as a variety of butt-weld connections.

Installation and Operation

Follow this procedure on every operating application in order to prevent hazardous conditions:

- Before installation, the swivel connection must be free of dirt, debris, foreign matter and other particles that could interfere with sealing.
- The mating piece for any NPT or NPSM connection is recommended to have a 30° chamfer where it will contact the swivel nipple, in order to aid metal-on-metal sealing. The lack of such a chamfer will result in minimal contact and a low ability to seal.

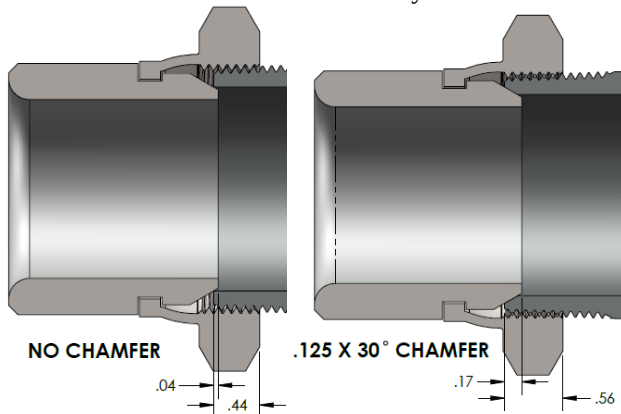

- When installed, an NPSM swivel should be tightened to the following torque values to ensure a metal-on-metal seal:

NPSM Size	In-lbs	Ft-lbs
1-1/2"	2840	237
2"	3720	310

The contents of this publication are for informational purposes only. While every effort has been made to ensure accuracy, these contents are not to be construed as warranties or guarantees, expressed or implied, regarding the products or services described herein or for their use or applicability. Marshall Excelsior Co. reserves the right to modify or improve the designs or specifications of such products at any time without notice.

The MEC™ logo is the trademark of Marshall Excelsior Co.



Introduction

The ME691 and ME693 series swivel connectors are designed to allow rigid connections between a socket or butt weld and NPT piping, NPSM or other similar connections.


Features:

- Steel or stainless material
- Crimped free-spinning swivel for ease of use and high holding strength
- Rust-inhibited weldment end compatible with standard and MEC™ weld sockets, as well as a variety of butt-weld connections.

Installation and Operation

Follow this procedure on every operating application in order to prevent hazardous conditions:

- Before installation, the swivel connection must be free of dirt, debris, foreign matter and other particles that could interfere with sealing.
- The mating piece for any NPT or NPSM connection is recommended to have a 30° chamfer where it will contact the swivel nipple, in order to aid metal-on-metal sealing. The lack of such a chamfer will result in minimal contact and a low ability to seal.

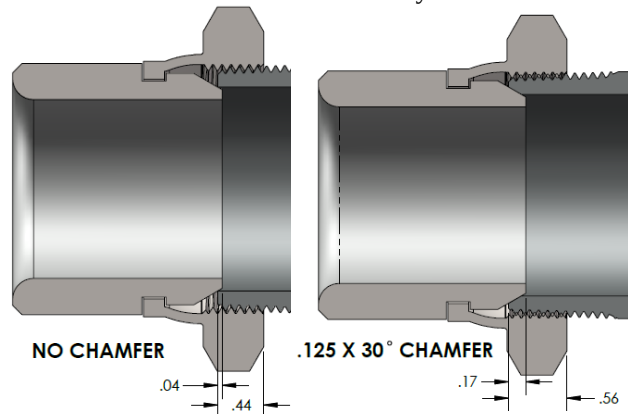

- When installed, an NPSM swivel should be tightened to the following torque values to ensure a metal-on-metal seal:

NPSM Size	In-lbs	Ft-lbs
1-1/2"	2840	237
2"	3720	310

The contents of this publication are for informational purposes only. While every effort has been made to ensure accuracy, these contents are not to be construed as warranties or guarantees, expressed or implied, regarding the products or services described herein or for their use or applicability. Marshall Excelsior Co. reserves the right to modify or improve the designs or specifications of such products at any time without notice.

The MEC™ logo is the trademark of Marshall Excelsior Co.