


Double Check Tank Fill Valves

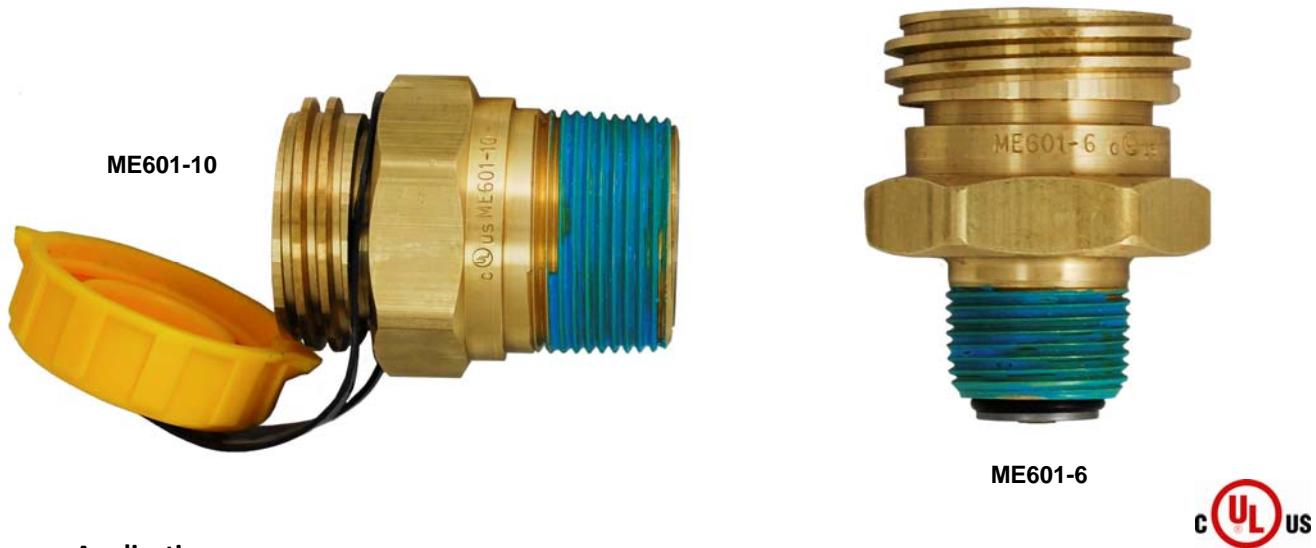

Application:

Designed for forklift, motor fuel and ASME residential tanks, these filler valves automatically open with pump pressure providing maximum product flow rates. Once flow ceases, both upper and lower check mechanisms close to prevent product loss from the container. The lower check serves as a secondary seat to limit product loss in the event that the primary upper seat fails to operate properly due to damage.

Features:

- Industry best flow rate
- Resilient bonded main valve seal
- Integral break away feature leaves primary check intact in the event of delivery truck roll away
- Field repairable upper check seat
- Factory applied thread sealant

Part #	Description	Flow Rate LPG	
		10 PSI	15 PSI
ME601-6	1-3/4" M. Acme x 3/4" MNPT Double Check Fill Valve w/ Cap & Lanyard		
ME601-10	1-3/4" M. Acme x 1-1/4" MNPT Double Check Fill Valve w/ Cap & Lanyard		
Accessories			
Part #	Description		
ME601-902	1-3/4" F. Acme Cap & Lanyard		
ME601-6SRK	ME601-6 Upper Check Seal Repair Kit		
ME601-10SRK	ME601-10 Upper Check Seal Repair Kit		