

# ASME/ DOT Container Service Valves


## Application:

Intended for use in vapor withdrawal service for ASME and DOT containers or as fuel line shutoff valves.

**Note:** These valves do not incorporate an integral pressure relief valve and are intended for use in containers that have a separate stand alone pressure relief valve sized to properly handle the container's capacity.

## Features:

- One piece forged brass body construction
- Dual o-ring packing design
- Easy to repair / replace bonnet assembly
- Universal bonnet assembly
- Industry best fill flow rate
- Factory applied thread sealant
- Heavy duty replaceable zinc hand wheel

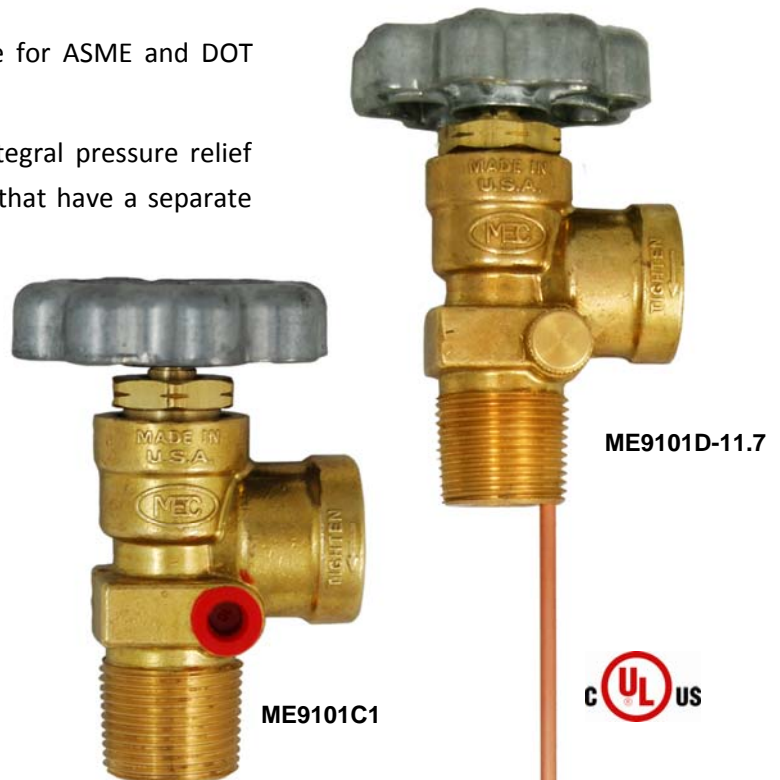

Part #	Description	Dip Tube Length
ME9101C1	3/4" MNPT X F. POL ASME/ DOT Service Valve	N/A
ME9101D-11.1	3/4" MNPT X F. POL ASME/ DOT Service Valve	11.1"
ME9101D-11.7	3/4" MNPT X F. POL ASME/ DOT Service Valve	11.7"
Accessories		
Part #	Description	
ME9101C1BRK	Complete ASME/ DOT Valve Replacement Bonnet Assembly w/ Handwheel	
ME9101BRK	Replacement Universal Bonnet Assembly, Less Handwheel - Fits All (MEC) Service Valves	
ME9101C1-102	ASME/ DOT Replacement Service Valve Handwheel - Zinc	
ME9101P5-109	Universal Replacement Handwheel Retaining Screw #10-32	
ME9101P5-114	Universal Replacement Service Valve Bonnet Seal	