
## MEC Excelerator<sup>™</sup> 2" & 3" Threaded Tee Body Internal Valves


## Features

- Durable ductile body with cadmium surface plating
- All stainless internal component construction
- One piece threaded packing gland
- Precision machined hard coated stem
- Fully retained nitrile seat disc
- Largest variety of excess flow closing values
- Roller cam actuation
- Industry's fastest bleed time
- Removable data plate
- Industry's easiest valve to service
- Standard construction utilizes nitrile seals
- Available with Neoprene, FKM, or FFKM seals
- UL LISTED for LPG & NH, service
- Rulon<sup>™</sup> bearings on stem and stub shafts

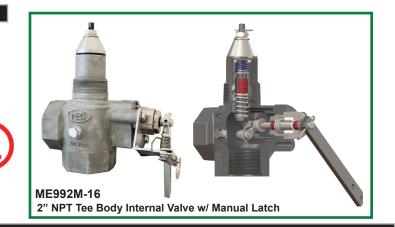

## Description

Intended for use on transport trucks and large storage tanks with 2" or 3" threaded connections in directional or bi-directional flow applications. Provides both manual shut-down and excess flow closing in the event of the piping being seperated from the valve. Can be equipped with manual latch, pneumatic or rotary actuator open/closing devices. All valve models are equipped with a breakaway feature in the cast body which permits the piping to shear off in the event of side impact, leaving the valve poppet intact and protecting the tank from catastrophic product loss. The tee body features an additional FNPT side discharge port. For liquid or vapor service applications.

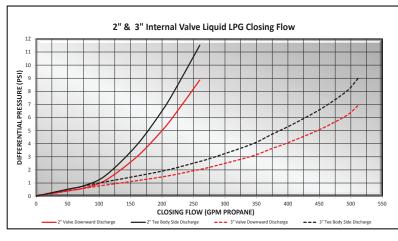

2" Valve Liquid Closing Flow Values
110 GPM LPG Closing Flow
160 GPM LPG Closing Flow
260 GPM LPG Closing Flow
2" Volue Liquid Cleasing Flow Volues
3" Valve Liquid Closing Flow Values
175 GPM LPG Closing Flow
250 GPM LPG Closing Flow
300 GPM LPG Closing Flow
375 GPM LPG Closing Flow
475 GPM LPG Closing Flow
500 GPM LPG Closing Flow

For NH<sub>3</sub> multiply GPM by .90 Side discharge increases differential to close by approx. 2 PSIG

MEC Excelerator <sup>™</sup> 2" & 3" Threaded Tee Body Internal Valves		
Part No. *	Description	
ME992-16-"X"	Excelerator <sup>™</sup> 2" MNPT x 2" FNPT Tee Body Internal Valve - Only	
ME992A-16-"X"	Excelerator <sup>™</sup> 2" MNPT x 2" FNPT Tee Body Internal Valve - with Pnuematic Actuator	
ME992AR-16-"X"	Excelerator <sup>™</sup> 2" MNPT x 2" FNPT Tee Body Internal Valve - with Rotary Actuator	
ME992M-16-"X"	Excelerator <sup>™</sup> 2" MNPT x 2" FNPT Tee Body Internal Valve - with Manual Latch	
ME992-24-"X"	Excelerator <sup>™</sup> 3" MNPT x 3" FNPT Tee Body Internal Valve - Only	
ME992A-24-"X"	Excelerator <sup>™</sup> 3" MNPT x 3" FNPT Tee Body Internal Valve - with Pnuematic Actuator	
ME992AR-24-"X"	Excelerator <sup>™</sup> 3" MNPT x 3" FNPT Tee Body Internal Valve - with Rotary Actuator	
ME992M-24-"X"	Excelerator <sup>™</sup> 3" MNPT x 3" FNPT Tee Body Internal Valve - with Manual Latch	
* Note: Indicate desired excess flow closing value when ordering - see chart for values i.e. ME992-24-250 (250 GPM) To order FFKM add "K" after the prefix part number i.e. ME992K-16-160 To order Neoprene add "N" for Neoprene after the prefix part number i.e. ME992N-16-160		

for Neoprene after the prefix part number

To order FFKM add "V" after the prefix part number i.e. ME992V-16-160

## PLEASE SEE BACK PAGE FOR ACCESSORIES, SERVICE AND REPAIR KITS





Accessories				
Part No.	Description			
MEP990-24	Excelerator, Manual Latch Assembly for 2" & 3" Threaded Internal Valves			
MEP650	Open/Close Cable Control Release with 50' Cable			
MEP651	Open/Close Cable Control Release - Only			
ME206	PowerStroke Actuator			
ME226	PowerTorq Direct Drive Actuator			

Service Kits & Repair Parts		
Part No.	Description	
ME990-16-VRK	Excelerator™2" Internal Valve Complete Valve Repair Kit	
ME990-16-SRK	Excelerator™2" Internal Valve Seal Repair Kit	
ME990-16-106-"X" *	Excelerator™2" Internal Valve Excess Flow Spring	
ME990-24-VRK	Excelerator™3" Internal Valve Complete Repair Kit	
ME990-24-SRK	Excelerator™3" Internal Valve Seal Repair Kit	
ME990-106-"X" *	Excelerator <sup>™</sup> 3" Internal Valve Excess Flow Spring	
ME990-PGA	Excelerator <sup>™</sup> 2" & 3" Internal Valve Packing Gland Assembly	
ME990-PRK	Excelerator™2" & 3" Internal Valve Stem Packing Repair Kit	
ME990-140	Excelerator™2" & 3" Manual Operating Lever - Standard	
ME990-160	Universal Internal Valve Fusible Link - 212° F.	
MEP147-01	Cable Connector Ring for 1-1/4" - 3" Internal Valves	

\* Note: Indicate desired excess flow closing value when ordering - see chart for values Example: ME990-16-106-260 (260 GPM) IE: ME990-107-250 (250 GPM)



