

MEC™ Excelsior-Flo High Capacity Compact First Stage Domestic Regulators

APPLICATION:

These first stage regulators are used to reduce LP gas tank pressures for a second stage regulator (normally 10 PSIG). All MEC first stage regulators are red indicating high outlet pressure. Compact First stage regulator vents have 3/8" FNPT tapped ports and E-Z Grip screens located over the outlet. The MEGR-1222H series offers optimal relief performance that well exceeds UL test requirements providing double failure overpressure protection when used with MEC MEGR-1622, MEGR-1642 & MEGR-1652 Series Second Stage regulators. All MEC Excelsior-Flo domestic regulators feature a 25 year recommended replacement life and our exclusive 3 part tear away leak check adhesive sticker.

MEGR-1122H Series: Offers a compact first stage regulator design perfect for tight applications such as underground tank domes. They feature an adjustment range from 9-12 PSIG (factory set @ 10 PSIG), stainless steel internal components, fluorocarbon (FKM) seat discs, molded lip fabric reinforced diaphragms and large aluminum precision machined orifice to minimize freeze ups while providing superior downstream regulation and maximum corrosion resistance against weather or contaminated gas.

MEGR-1222H Series: offers a compact first stage regulator design perfect for tight applications such as underground tank domes. They feature an adjustment range from 9-12 PSIG (factory set @ 10 PSIG), stainless steel internal components, fluorocarbon (FKM) seat discs, molded lip fabric reinforced diaphragms and large aluminum precision machined orifice to minimize freeze ups while providing superior downstream regulation and maximum corrosion resistance against weather or contaminated gas.


- F. POL outlet version features **NEW patent pending anti-freeze heat transfer fins**



SPECIFICATIONS:

Type: First Stage
Max. Inlet Pressure: 250 PSIG
Exterior Finish: Red Powder Coat
Orifice Size: .14" (Compact) / 3/4" Outlet .17"
Diaphragm: Fabric Reinforced NBR Molded Lip O-Ring Bonnet/Body Seal
Relief Type: Internal Relief - Spring Loaded
Bonnet / Body Material: Die Cast Aluminum
Seat Material: Fluorocarbon (FKM)
Listings: cUL_{US} / UL 144
Mounting Holes: Standard 3-1/2" Center
Pressure Taps: #54 Orifice 1/8" FNPT Plugged (2)
Relief Travel Stop: Molded in Adjustment Cap - Gray (Compact)

New Feature!

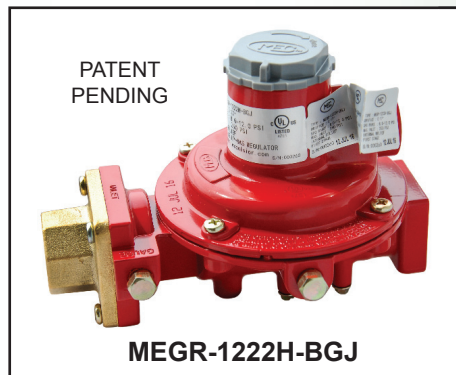

MEC Excelsior-Flo First Stage Domestic Regulators					
Part No.	Capacity in BTU/H LPG ⁽¹⁾	Inlet	Outlet	Outlet Adj. Range (PSI)	Outlet Set Point (PSI)
MEGR-1222H-AAJ	1,000,000	1/4" FNPT	3/8" FNPT	9-12	10
MEGR-1222H-AAJXB ⁽²⁾	1,000,000	1/4" FNPT	3/8" FNPT	9-12	10
MEGR-1222H-BGF	1,000,000	F. POL	1/2" FNPT	9-12	10
MEGR-1222H-BGFXB ⁽²⁾	1,000,000	F. POL	1/2" FNPT	9-12	10
MEGR-1222H-BGJ	1,700,000	F. POL	3/4" FNPT	9-12	10

(1) Based on 30 PSIG Inlet pressure and 20% droop
 (2) Indicates vent orientation over pressure taps



For Your Local Marshall Excelsior Distributor Call 269-789-6700,
 Fax 269-781-8340 or E-mail: sales@marshallexcelsior.com
 www.marshallexcelsior.com



Tested in the U.S.A