


MEC *Excelsior-Flange*™ 2"- 4 Bolt Flange High Flow Extended Auxiliary Pump Discharge Tee Adapter

APPLICATION:

Designed to allow for high flow liquid transfer from the pump auxiliary discharge on mobile transport applications. The MEP999SPE-16 Series is available in WCC A216 Steel construction and features a high flow tee design with 2" – 4 bolt type "A" (O-ring Groove) *Excelsior-Flange*™ inlet/outlet connections.

FEATURES:

- All cast steel (WCC A216) construction for maximum durability, and reduced leak points
- Approved for use in LPG or NH3 service
- Rated 400 WOG
- For use with all Type B (ME842 / ME843 Series) companion flanges

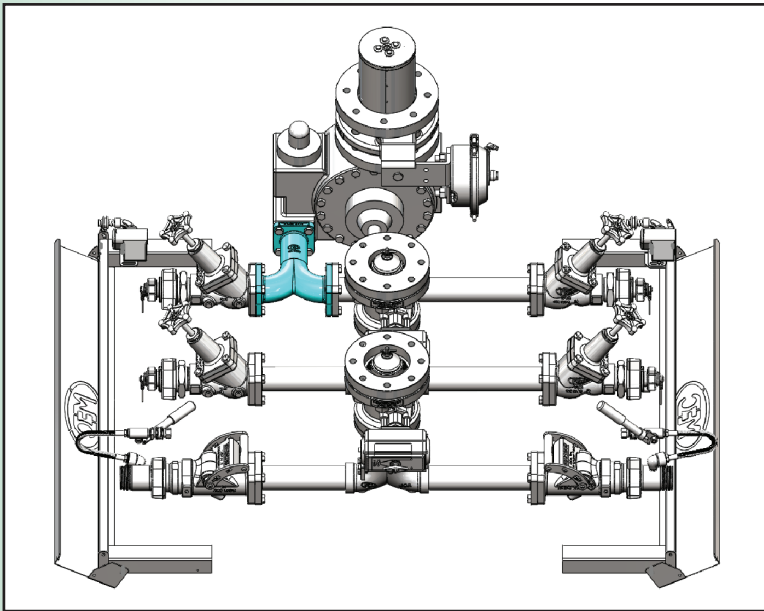

Part No.	Description	Material	Flange Type	Weight (lbs)
MEP999SPE-16	<i>Excelsior-Flange</i> ™ 2" -4 Bolt (3) Extended Tee Adapter	WCC A216 Steel	A	12.1



For Your Local Marshall Excelsior Distributor Call 269-789-6700,
 Fax 269-781-8340 or E-mail: sales@marshallexcelsior.com
www.marshallexcelsior.com

