


Open Top Burner Valves

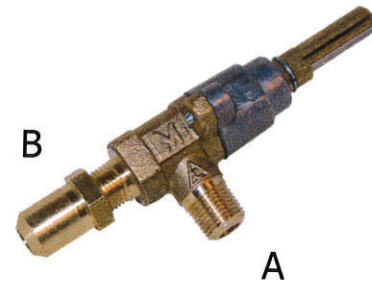

Model Number	A Thread Size Inlet	B Thread Size Outlet	Valve Type	Locking Type	Stem Orient- ation	Rotation To Open	Delta C
MV 2802-1318100	1/8 MNPT	3/8-27 UNS	On/Off	Non-Locking	Flat Same	CCW	350°
MV 2802-0030700	1/8 MNPT	3/8-27 UNS	On/Off	Non-Locking	Flat Opposite	CCW	350°
MV 2802-0877500	1/8 MNPT	3/8-27 UNS	On/Off	Locking	Flat Same	CCW	350°
MV 2802-0983900	1/8 MNPT	3/8-27 UNS	On/Off	Locking	Flat Opposite	CCW	350°
MV 2802-MP100	1/8 MNPT	3/8-27 UNS	Hi / Low	Locking	Flat Same	CCW	350°
MV 2802-MP101	1/8 MNPT	3/8-27 UNS	Hi / Low	Locking	Flat Opposite	CCW	350°
MV 2802-MP200	1/8 MNPT	3/8-27 UNS	Hi / Med / Low	Locking	Flat Same	CCW	350°
MV 2802-MP201	1/8 MNPT	3/8-27 UNS	Hi / Med / Low	Locking	Flat Opposite	CCW	350°

Options	Built to Order	Standard
Plug Length	Specify	2-1/8" & 2-1/2"
Mill Cut	Specify	.240-.242
Mill Cut Orientation	Specify	Flat Same
Stem Slitting	Specify	.745-.815
To Open Rotation	Specify	CCW

Features:

- Two Piece non-displacing stem for maximum security
- Convenient wrench flat on body for easy installation
- Heavy duty commercial grade construction
- 40,000 Minimum BTU/Hour in full on position
- 1,000 - 10,000 BTU/Hour adjustable low for MP (multi-position) valves
- Custom adapters for inlet & outlet along with orifice hoods upon request
- Stem Length Available from 1-7/8" to 2-1/2"
- CSA, CGA, AGA & IAS Approved Detal "C" 350°

Matchless Valve Company