


Front Handle Off - On Valves

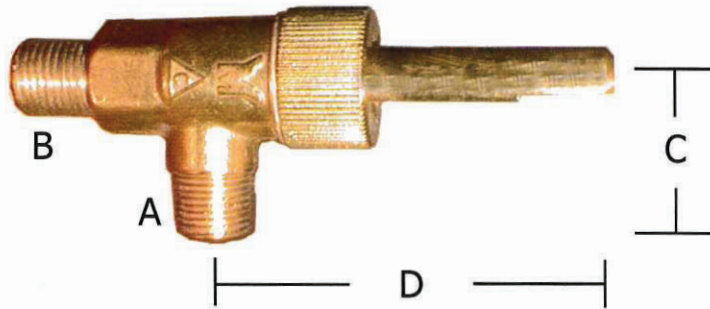

Model Number	A Thread Size	B Thread Size	C	D Plug Length	Rotation To Open	Point	Hood Drill Size	Delta C	Notes
MV LML-15	1/8 MPT	3/8-27	7/8"	Specify	Specify	Specify	Specify	350°	
MV LML-15HD1	1/8 MPT	#16-36 orifice spud tap	7/8"	Specify	Specify	Specify	Specify	350°	
MV 3113	1/8 MPT	¼ CC	7/8"	Specify	Specify	Specify	Specify	350°	
MV 3141	3/8-27	1/8 MPT	7/8**	Specify	Specify	Specify	Specify	350°	Reverse-Flow *1-1/4 w/ hood Off-Adj-Low
MV 3133	1/8 MPT	1/8 MPT	7/8"	Specify	Specify	Specify	Specify	350°	

<i>Extensions</i>	Female	Male	Length
MV LML-15 EXT-1	3/8-27	3/8-27	1"
MV LML-15 EXT-2	3/8-27	3/8-27	2-1/8"
MV LML-15 EXT-3	3/8-27	3/8-27	2-3/4"
MV LML-15 EXT-4	3/8-27	3/8-27	3-1/8"
MV LML-15 EXT-1-2	3/8-27	1/8 MPT	1"

<i>Adapters</i>	Female	Outlet
MV LML-15-AD-A	3/8-27	1/8 CC
MV LML-15-AD-C	3/8-27	3/16 CC
MV LML-15-AD-D	3/8-27	1/4 CC
MV LML-15-AD-E	3/8-27	5/16 CC
MV LML-15-AD-F	3/8-27	3/8 CC
MV LML-15-AD-G	3/8-27	7/16 CC
MV LML-15-AD-H	3/8-27	1/2 CC

Options	Built to Order	Standard
Plug Length	Specify	1-7/8" & 2.00"
Plug Drill	Specify	Specify
Mill Cut	Specify	.240-.242
Mill Cut Orientation	Specify	Flat Same
Stem Slitting	Specify	.560-.563
To Open Rotation	Specify	CW or CCW
Orifice Hood	Specify	Specify
Hood Drill	Specify	Specify
Hood Stamp	Specify	Specify
Point	Specify	C-Point / Jet

Notes:

CSA, CGA, AGA & IAS Approved
 Delta "C" 350°
 Hexagon Base for Quick Installation
 Built to Your Exact Specifications & Rigorously Tested

Matchless Valve Company

Call Toll Free: (888) 464-7055