

# Excela-Flo


## COMPACT INTEGRAL TWO STAGE 2 PSI REGULATORS MEGR-300 SERIES

### APPLICATION:

The MEGR-300 Compact Integral Two Stage 2 PSI Regulator is approved for use in nearly all portable applications and light duty domestic installations. Ideally suited for installations to reduce tank pressure to a nominal 2 PSI outlet pressure. 2 PSI systems typically incorporate a line service regulator within the home that further reduces the 2 PSI system pressure to approximately 11" WC prior to the appliance. These regulators feature all zinc body construction, red powder coated bonnets (identify 2 PSI model), high and low 1/8" NPT pressure tap ports, an integral second stage drip lip vent, and optional standard or 90 degree vent locations. The MEGR-300 series compact high capacity integral two stage regulator meet UL, and NFPA requirements.

### FEATURES:

- Type: Two Stage
- Max. Inlet Pressure: 250 PSI
- Inlet Connection: 1/4" FNPT
- Outlet Connection: 3/8" FNPT
- Exterior Finish: Red Powder Coat / Raw Zinc
- Diaphragm: Fabric Reinforced Molded with O-Ring Bonnet / Body Seal
- Diaphragm Type: Internal Relief - Spring Loaded
- Bonnet / Body Material: Die Cast Zinc
- Listings: UL LISTED / UL 144
- Mounting Holes: 3-1/2" On Center
- Pressure Taps: 1/8" FNPT Plugged

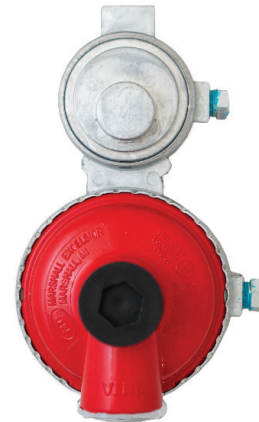

**MEGR-300**  
Regulator with Drip Lip Vent



Part No.	Description	BTU/H LPG @ 30 PSI Inlet*
<b>MEGR-300</b>	Compact 2 Stage 2 PSI Regulator 1/4" FNPT Inlet x 3/8" FNPT Outlet	225,000
<b>MEGR-300-90</b>	Compact 2 Stage 2 PSI Regulator 1/4" FNPT Inlet x 3/8" FNPT Outlet - 90° Vent	
Accessories		
Part No.	Description	
<b>MEGR-900</b>	Universal Z Regulator Bracket 3-1/2" Centerline	
<b>MEGR-861</b>	Universal First Stage Cover - Plastic	
<b>MEGR-862</b>	Universal Second Stage Cover - Plastic	

\* BTU/H Capacity @ 20% Droop

\* Setpoint: 100 PSIG Inlet @ 2 PSI Outlet Flowing @ 30 SCFH Air