




External Pressure Relief Valves

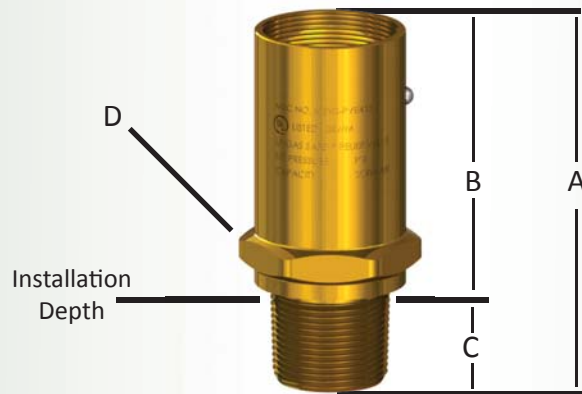

MEVS-PVE431/250

APPLICATION:

Designed for use with storage containers as a primary pressure relief valve on ASME above and below ground installations. All working components and external to the container connection away from possible product contaminants. Compatible with all standard LPG pressure vessels with NPT couplings.

FEATURES:

- Compact design to fit any application
- Brass construction for LP-Gas application
- 3/4" MNPT & 1" MNPT to fit domestic tank ports
- Specially designed internal components increase flow at discharge
- Custom start-to-discharge settings available upon requested
- Non-adjustable, tamper resistant design
- Protective poly cap included
- Economically priced



External Relief Valves								
Part No.	Description	Material	STD Setting	Flow Capacity SCFM/Air UL @ 120% Set Pressure	OAL Length (A)	Height (B)	Install Depth (C)	Install Hex (D)
MEVS-PVE431B/250	3/4" MNPT Vapor Relief Valve w/ Cap	Brass	250 PSIG	1,740	3-21/64"	2-7/16"	1"	1-3/4"
MEVS-PVE431/250	1" MNPT Vapor Relief Valve w/ Cap	Brass	250 PSIG	1,740	4"	2-53/64"	3/4"	1-3/4"
External Relief Valve Accessories								
Part No.	Description							
MEPS-UT12X	Replacement Poly Cap for MEVS-PVE431 & 431B							
MEPS-431	1" FNPT Pipeaway Adapter for MEVS-PVE431 & 431B							

